

NBOT / VBOT PROSTICK 2.0.2



1. HOW TO CHANGE PROSTICK VER 2.0.2 TO NBOT / VBOT MODE




Set proSTICK to firmware update mode by turning down DIP switch . Then, turn the power off and on again.




Check LCD for status update


1. HOW TO CHANGE PROSTICK VER 2.0.2 TO NBOT / VBOT MODE

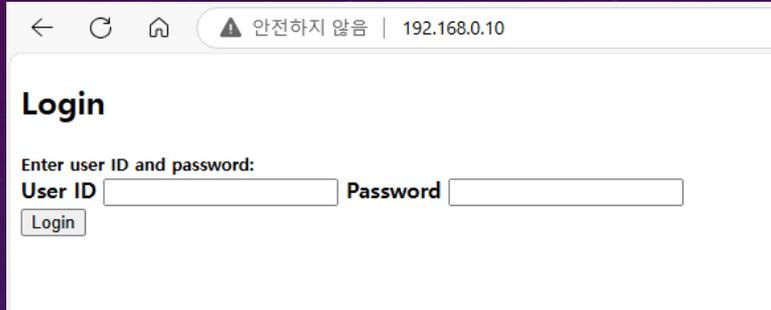


Access the web at 192.168.0.100 in the Internet Explorer on your PC. Click Login without entering an ID or Password (This is possible in a network environment where 192.168.0.100 is accessible).

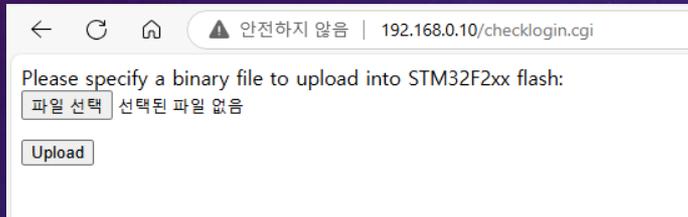

Click on "Choose File"

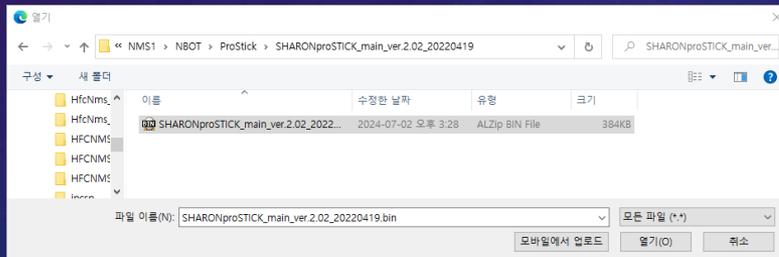

After choosing your file, click "open"

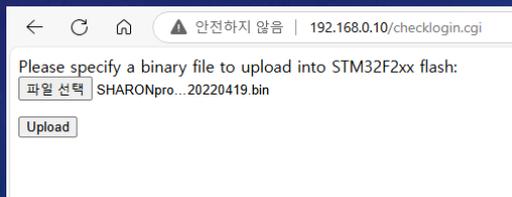

Click "Upload"



Check update status
on LCD

When the update completion screen appears, raise the DIP switch and then turn the power off and on again. (The previously set IP list will be reset, so you will need to reconfigure the Pan/Tilt Head IP settings.)